






# Heavy Duty Commercial Ceiling Fans

NOTE: All measurements are calculated from ceiling or beam line with "J" hook mounted securely in center of 1 1/2" deep conduit box and downrod supplied on rubber roller (See illustration).

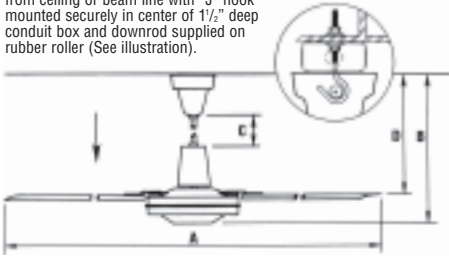

### ENERGY EFFICIENCY

MODEL	AIRFLOW
36201A	3,610 cfm
48201A	7,109 cfm
56001LCA	8,168 cfm

### ELECTRICITY USE

80.3 watts
100.9 watts
108.9 watts

### AIRFLOW EFFICIENCY

45 cfm/watt
70 cfm/watt
75 cfm/watt

## HEAVY DUTY COMMERCIAL MODELS

MODEL NUMBER	BLADE SWEEP	COLOR	VOLTS	CYCLE	FULL LOAD AMPS	FULL LOAD WATTS	RPM	MAX CFM†	AREA COVERAGE PER FAN††	WEIGHT
36201A	36"	WHT	120	50/60	.65	75	395	12,500	1600 sq.ft.	20 lbs
48201A	48"	WHT	120	50/60	.85	86	315	21,000	2025 sq.ft.	22 lbs
56001LCA	56"	WHT	120	50/60	1.0	110	265	25,500	3025 sq.ft.	24 lbs

## ACCESSORIES & MISCELLANEOUS ITEMS

CATALOG NUMBER	DESCRIPTION	SHIP WEIGHT
28001	FAN GUARD 62" DIAMETER FOR INDUSTRIAL 56" AND 60" FANS	50 LBS
28002	FAN GUARD 52" DIAMETER FOR INDUSTRIAL 36" AND 48" FANS ONLY ♦	40 LBS
9FP024	WHITE TILTED CANOPY COVER - BROWN (9FP023), BLACK (9FP023B) ♦	1 LB
9D12BW	DOWNRODS - 12" ALSO AVAILABLE IN BROWN, REPLACE "W" IN MODEL NUMBER WITH "B"	1 LB
9D18BW	DOWNRODS - 18" ALSO AVAILABLE IN BROWN, REPLACE "W" IN MODEL NUMBER WITH "B"	3 LBS
9D36BW	DOWNRODS - 36" ALSO AVAILABLE IN BROWN, REPLACE "W" IN MODEL NUMBER WITH "B"	3 LBS
9D48BW	DOWNRODS - 48" (FOR LONGER SIZES - CONSULT FACTORY)	4 LBS
99992	OUTDOOR LOCATION INSTALLATION KIT*	1 LB
9DKITB	DOWNROD EXTENSION KIT	2 LBS

♦ Fan Guards ship via UPS \*Only for use with harsh env. fans.

Custom models available. Consult with factory for information and specifications.

Note: Models shown above sold with 12003 wall-mounted motor speed controller.

## OPTIONAL SOLID STATE MOTOR SPEED CONTROLS

MODEL NUMBER	VOLTS	AMPS	CONTROLS	CONTROLS	CONTROLS
			36"/120 36201A UNITS	48"/120 48201A UNITS	56"/120 56001LCA UNITS
12003	120	3	3	2	2
12006	120	6	7	5	5
12008	120	8	10	6	6
12012	120	12	12	10	10

## NOISELESS MECHANICAL CONTROL

12001N	120	1	1	1	For use with 48" and 56" models only.
12005N	120	5	2	2	

3 YEAR WARRANTY REGISTRATION AGAINST MANUFACTURERS DEFECTS IS INCLUDED WITH EACH FAN.

† Effective amount of air volume moved past a plane 20ft. from fan, industry test. All specifications subject to change and improvement.

†† Area coverage rated for heat destratification at 20' blade mounting height.