


PROJECT _____ DATE _____ SHEET _____ OF _____	ENGINEER _____ ARCHITECT _____ CONTRACTOR _____	SUBMITTED BY _____ NOTES: _____ NOTES: _____
---	---	--

Specifications:
 24" to 60" sizes available with 115/230V, 1PH or 230/460V, 3PH totally enclosed or explosion motors.
 Heavy gauge steel blade with cast iron pillow blocks and sealed ball-bearing shaft support.
 14 gauge steel venturi with welded steel tube bracing. Industrial enamel grey finish.
 Shipped fully assembled. 1-year warranty.

Options Available:
 Reverse flow for supply. Venturi can be reversed when flat front is required (steel or metal buildings). Acid resistant coating. Cast aluminum blades for explosion proof applications. Call factory.

Accessories:
 Shutters, front and rear guards, or complete shutter, rear guard and wall collar package assembly.

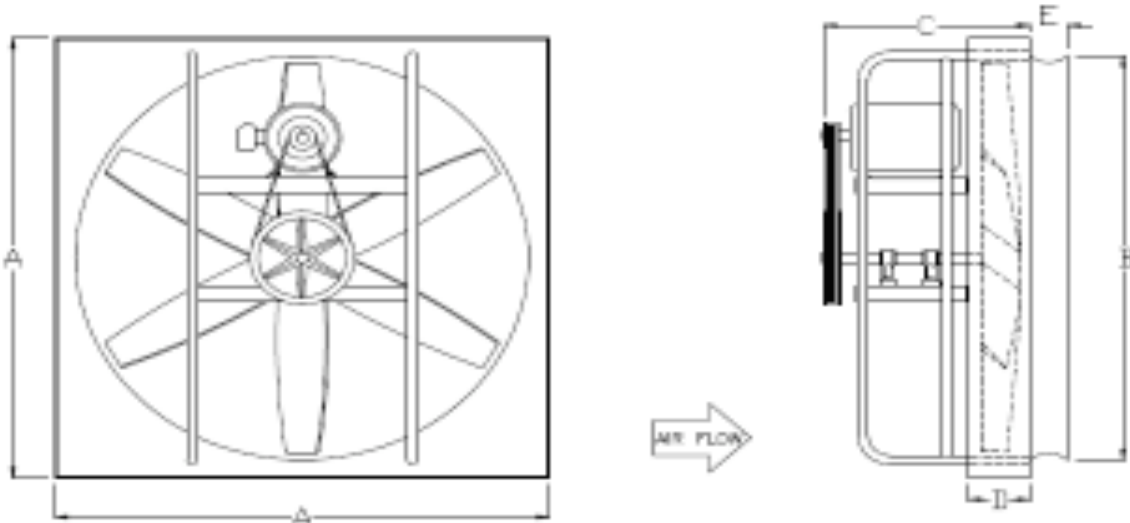

FAN DIA.	A	B	C	D	E
24"	30"	25-1/2"	20"	2-3/4"	3-1/2"
30"	36"	31-1/2"	20"	2-3/4"	3-1/2"
36"	42"	37-1/2"	22"	2-3/4"	4"
42"	48"	44"	24"	2-3/4"	4-1/4"
48"	54"	50-1/2"	25"	2-3/4"	4-1/2"
60"	66"	62"	28"	2-3/4"	5"

ITEM	QTY.	MARK	MODEL NUMBER	BLADE DIA.	PANEL SIZE SQ.	MOTOR HP	VOLTS	PHASE	MOTOR TYPE TE / EXP	RPM	CFM @ 0" SP	APPROX. WEIGHT