




PROJECT _____	ENGINEER _____	SUBMITTED BY _____
DATE _____	ARCHITECT _____	_____
SHEET _____ OF _____	CONTRACTOR _____	_____

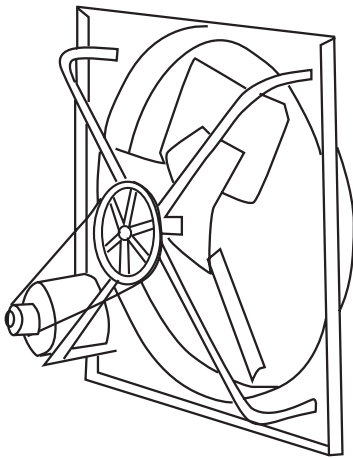

Specifications:

Motor: 115v, single phase, open drip proof, permanently lubricated.
(Sleeve bearing on 24", 30" and 36" / Ball bearing on 42")

Blade: Precision balanced aluminum with heavy gauge plated steel spider and hub.

Venturi : Hot dipped galvanized.

Assembly: Shipped fully assembled.

MODEL NUMBER	MOTOR HP	BLADE SIZE	PANEL SIZE SQ. "	CFM (FREE AIR)	AMPS	SHIPPING WT (LBS)
BE24	1/2	24"	28"	6500	6.0	58
BE30	1/2	30"	34"	8300	6.0	65
BE36	1/2	36"	40"	10400	6.0	78
BE42	3/4	42"	46"	14000	9.2	92

ITEM	QUANTITY	MARK	MODEL NUMBER	MOTOR HP	BLADE SIZE	PANEL SIZE SQ. "	CFM (FREE AIR)	AMPS	SHIP WT (LBS)

COMMERCIAL BELT DRIVE EXHAUST FAN - BE SERIES **SUBMITTAL SHEET**