


PROJECT	ENGINEER	SUBMITTED BY
DATE	ARCHITECT	NOTES:
SHEET	OF	CONTRACTOR

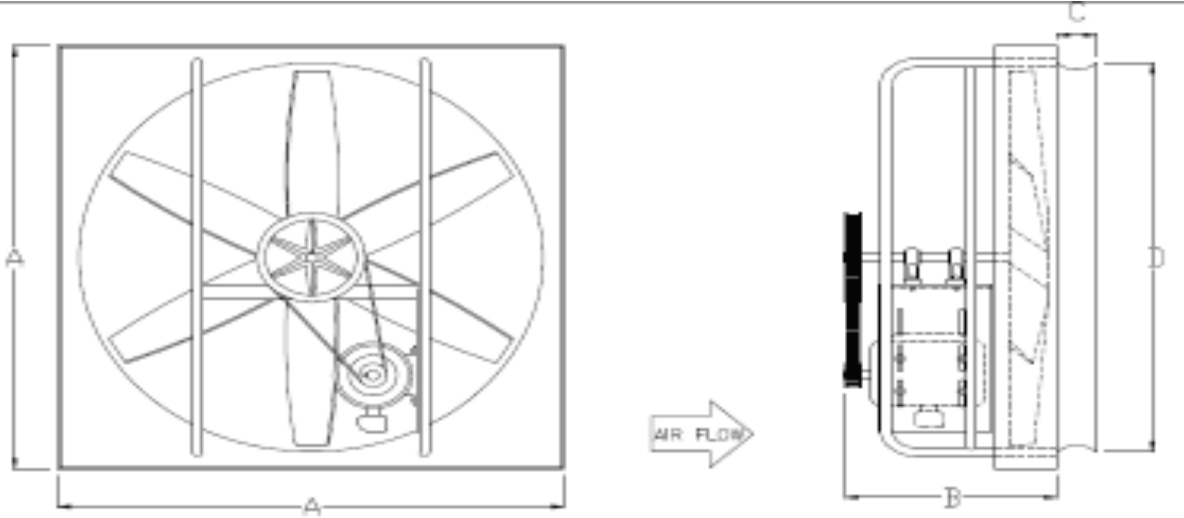

Specifications:
 24" to 60" Sizes available with 115/230V, 1PH or 230/460V, 3PH, totally enclosed fan cooled permanently lubricated motors.
 16 Gauge steel venturi with steel tube bracing with industrial grey enamel finish.
 Steel blades with double pillow block bearing shaft support.
 Shipped completely assembled. 1-year warranty.

Accessories:
 Shutters, front and rear guards, or complete shutter, rear guard and wall collar package assembly.

BLADE	A	B	C	D
24"	30"	18"	3-1/2"	25-1/2"
30"	36"	18"	3-1/2"	31-1/2"
36"	42"	20"	4"	37-1/2"
42"	48"	20"	4-1/4"	44"
48"	54"	22"	4-1/2"	50-1/2"
60"	66"	28"	5"	62"

ITEM	QTY.	MARK	MODEL NUMBER	BLADE DIA.	PANEL SIZE SQ.	MOTOR HP	VOLTS	PHASE	MOTOR TYPE	RPM	CFM @ 0" SP	APPROX. WEIGHT
									TE			
									TE			
									TE			
									TE			
									TE			
									TE			

PEF INDUSTRIAL BELT DRIVE EXHAUST FAN **SUBMITTAL SHEET**