




# PRODUCT SUBMITTAL SHEET

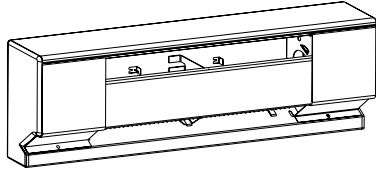

Capacities
376 TO 2500 W 145 or 250 Watts/ft. 2'6", 3', 4', 5', 6' or 8' lengths

## QMKA SERIES COMMERCIAL CONVECTOR BASEBOARD HEATERS

Job Name: \_\_\_\_\_

Location: \_\_\_\_\_

Architect: \_\_\_\_\_

Engineer: \_\_\_\_\_

Contractor: \_\_\_\_\_


Submitted By: \_\_\_\_\_

Date: \_\_\_\_\_

Submitted By:	Date:
Approved By: _____	
Date: _____	

Item	QTY	Catalog Number	Tag	Watts	Volts	PH	AMPS	Length	Weight

ACCESSORIES			
Item	QTY	Part Number	Tag

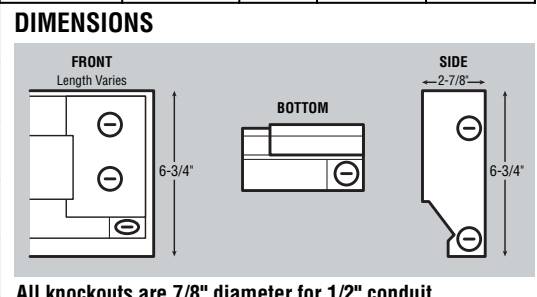

CATALOG NUMBER	VOLTS	WATTS	BTU/HR	AMPS	LENGTH	WT. (LBS.)
QMKC25126W	120	500	1706	4.2		
QMKC25026W	208	500	1706	2.4	2'6"	7.8
QMKC25426W	240/208	500/376	1706/1283	2.1/1.8		
QMKC25726W	277/240/208	500/376/282	1706/1283/962	1.8/1.6/1.4		
QMKC2513W	120	750	2560	6.3		
QMKC2503W	208	750	2560	3.6	3'	9.0
QMKC2543W	240/208	750/564	2560/1925	3.1/2.7		
QMKC2573W	277/240/208	750/564/423	2560/1925/1443	2.7/2.4/2.0		
QMKC2514W	120	1000	3413	8.3		
QMKC2504W	208	1000	3413	4.8	4'	11.5
QMKC2544W	240/208	1000/752	3413/2567	4.2/3.6		
QMKC2574W	277/240/208	1000/752/564	3413/2567/1925	3.6/3.1/2.7		
QMKC2515W	120	1250	4266	10.4		
QMKC2505W	208	1250	4266	6.0	5'	13.0
QMKC2545W	240/208	1250/940	4266/3208	5.2/4.5		
QMKC2575W	277/240/208	1250/940/705	4266/3208/2405	4.5/3.9/3.4		
QMKC2516W	120	1500	5120	12.5		
QMKC2506W	208	1500	5120	7.2	6'	15.5
QMKC2546W	240/208	1500/1128	5120/3850	6.3/5.4		
QMKC2576W	277/240/208	1500/1128/846	5120/3850/2887	5.4/4.7/4.1		
QMKC2508W	208	2000	6826	9.6	8'	20.0
QMKC2548W	240/208	2000/1504	6826/5133	8.3/7.2		
QMKC2578W	277/240/208	2000/1504/1128	6826/5133/3850	7.2/6.3/5.4		
QMKC25008W	208	2500	8533	12.0	8'	20.0
QMKC25408W	240/208	2500/1880	8533/6416	10.4/9.0		
QMKC25708W	277/240/208	2500/1880/1410	8533/6416/4811	9.0/7.8/6.		

### Accessories

CATALOG NUMBER	DESCRIPTION	CASE QTY.	CASE WEIGHT (lbs.)
TA1AW	SP Thermostat, rated 22A @ 120-277V 15.5A @ 347V, 10A @ 600V	1	1
TA1PAW	Tamper resistant version of above.	1	1
TA2AW	DP Thermostat, rated 22A @ 120-277V 15.5A @ 347V, 10A @ 600V	1	1
TA2PAW	Tamper resistant version of above.	1	1
HCA121520W	120V Load Transfer Switch.	1	1
HCA241520W	240V Load Transfer Switch.	1	1
RA1W	120V Duplex Receptacle	1	1
RA1COMPW	Duplex Receptacle Cover Only. (carton of 10)	10	3
DSW2W	Double Pole Power ON/OFF Switch Rated 20A @ 120-277V	1	1
PR24	Single Pole Power Relay 24V Control Rated 30A @ 120-240V 23A @ 277V, 10A @ 347V	1	1
PR120	Same as above except 120V Control.	1	1
RSA1224	120/24V Transformer Relay - 25A	1	1
RSA2024	208/24V Transformer Relay - 25A	1	1
RSA2424	240/24V Transformer Relay - 25A	1	1
RSA2724	277/24V Transformer Relay - 25A	1	1
ICAW	Inside Corner.	1	1

### Blank Sections

CATALOG NUMBER	DESCRIPTION	CASE QTY.	CASE WEIGHT (lbs.)
QMKCBDA2W	2' 6" Blank Section	1	3
QMKCBDA3W	3' Blank Section	1	4
QMKCBDA4W	4' Blank Section	1	6
QMKCBDA5W	5' Blank Section	1	8
QMKCBDA6W	6' Blank Section	1	10
QMKCBDA8W	8' Blank Section	1	13

### ARCHITECT'S & ENGINEER'S SPECIFICATIONS\*

Furnish and install where indicated on plans, electric baseboard heaters, suitable for continuous operation as manufactured by QMark, A Marley Engineered Products Brand, Bennettsville, SC. Heaters shall be cULus listed.

ENCLOSURE: The heaters shall be fabricated of minimum .024 in. steel with minimum .040 in. steel control boxes. Support brackets shall be .035 in. steel. Junction box enclosure to have provisions for incoming and outgoing cable with cable clamp for restraining without additional hardware. Ground wire pigtail provided in each junction box for grounding.

FRONT COVER: The front cover shall be fabricated of minimum .048 in. steel.

HEATING ELEMENT: The heating element wire shall consist of 80% nickel, 20% chromium, and shall be encased in steel sheath to assure long and trouble free life. Aluminum fins shall be so designed as to block sheath radiation to front and back of heater body and pressure bonded to steel sheath.

INSTALLATION: Heaters shall be designed to permit use of supply conductors with 60°C insulation.

GENERAL: Navajo White durable textured polyester powder coat finish for corrosion resistance. Linear thermal cut-out shall be factory installed to automatically shut off heater in event of overheating and reactivate heater when temperatures return to normal. The complete heater shall have a height of 6-3/4 inches and a depth of 2-7/8 inches. Heaters shall have cULus approval for mounting on any floor surface including carpeting

\* QMark reserves the right to change specifications without prior notice.